THACO AUTO



EXTERIOR

TF2800 - DIESEL LIGHT DUTY TRUCK - A COMPLETELY NEW TRUCK



INTERIOR

An extensive and comfortable space





The ceiling and door panels have simili for easy cleaning.



2-way hot/cold air conditioning, equipped with cigarette lighter, 12V power port









3.1 inch LCD screen. Fully equipped with indicator lights to help operate the vehicle safely

ENGINE

D19TCIE3

BOSCH fuel injection control system





Cylinder capacity (cc): 1910



Max. Power (Ps/rpm): 116 / 3.600




Max. torque (Nm/rpm): 285 / 1.600-2.600

GEARBOX

Wanliyang

Spare parts are popular in Vietnam, easy to replace and maintain

The gear setting mechanism has a counterweight to help shift gears smoothly. Equipped with a Power Take Off (PTO) to facilitate the design of specialized vehicle body products

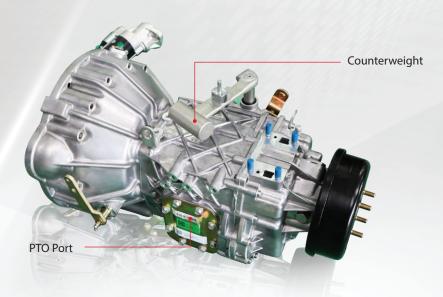

05 forwards + **01** reverse

CHASSIS SYSTEM

2-layer chassis, large cross-section, high load capacity. U cross section (mm): 132x50x(5+4).





FRONT SPRING

Leaf spring, combined with hydraulic shock absorbers



TYRES

Maxxis Tires 185R15, tubeless tire



FUEL TANK

Aluminum alloy, durable, anti-rust



REAR AXLE

Welded steel, high load capacity




REAR SPRING

2-stage leaf spring (main + auxiliary) , high load capacity, stable operation

BRAKING SYSTEM

Equipped with ABS braking system to help increase braking efficiency and ensure safety



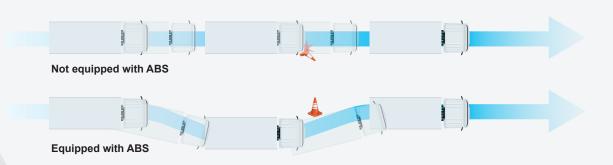


STANDARD BODY TRUCK



SPECIALIZED TRUCK







TARPAULIN-COVERED TRUCK WITH TAIL LIFT



POULTRY TRUCK



DRIVING SHOOL TRUCK



GLASS TRUCK



REFRIGERATED TRUCK



DUMP TRUCK



GARBAGE TRUCK



MOBILE TRUCK

DESIGN AND PRODUCTION

ACCORDANCE SPECIAL REQUIREMENTS FROM CUSTOMER



SPECIFICATION





CATEGORY	UNIT	TF2800
DIMENSIONS		
Overall lenght	mm	2.880
Overall Dimensions	mm	5.415x1.835x2.620
Dimensions inside the tank	mm	3.500x1.670x1.720
Cabin Dimensions (width)	mm	1.650
Number of seats	Seat	02
WEIGHT		
Curb weight	kg	1.665
Load capacity	kg	1.990
Gross weight	kg	4.250
ENGINE		
Engine name		D19TCIE3
Туре		Diesel, 4-stroke, 4 cylinders in line, turbocharged, air-cooled, liquid-cooled, electronically controlled direct fuel injection
Cylinder capacity	СС	1910
Maximum power/rotation speed	Ps/rpm	116 / 3.600
Torque/rotation speed	N.m/rpm	285 / 1.600-2.600
Transmission		5 forward gear, 1 reverse gear
Tire		185R15 (lốp không săm)
Turning radius	m	6.15
Ability to climb slopes	%	44,8% (tay số 1)
Max speed	Km/h	115
Fuel tank capacity	liter	55

^{*} Images may differ from actual product, specifications are subject to change without notice.

COLOR (STANDARD)









